


## **COUNTY OF PLACER**

**Community Development Resource Agency** 

**BUILDING** 

## **SMOKE DETECTORS**

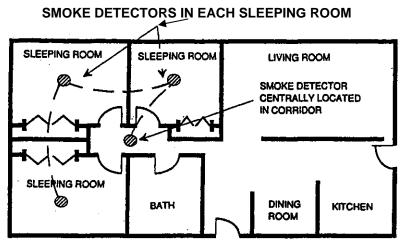


**Smoke Detectors**; Where more than one smoke detector is required to be installed within an individual dwelling unit, the smoke detector shall be interconnected in such a manner that the activation of one alarm will activate all of the alarms. (CBC § 907.2.10.3) Smoke alarms in alterations, repairs or additions exceeding \$1,000 are to be interconnected to alarms in the existing dwelling when the wiring for such alarms is exposed in the construction / remodel, or when accessible through an attic, crawl space or basement. (CBC §907.2.10.5.2) Refer to code sections for exact wording.

## 

**KITCHENS** shall have ground fault circuit interrupter protection where the receptacles are installed to serve the countertop surfaces. (CEC § 210.8 - A6) At least one receptacle shall be installed at each island counter space, unless a range top or sink is considered to divide the countertop into two spaces. (CEC § 210.52-C2) Refer to code sections for exact wording.

## **BATHROOM PLUGS**

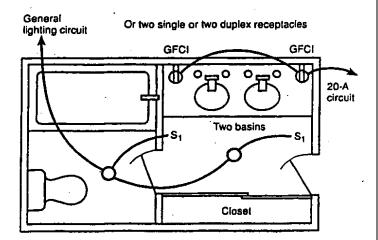

**Bathroom Receptacles**; at least one electrical receptacle shall be provided adjacent to the lavatory in each bathroom, (CEC § 210-52-B). At least one 20 ampere branch circuit shall be provided to supply the bathroom receptacles. Such circuits shall have no other outlets. (NEC § 210.11 –C3). These receptacles shall have GFCI protection. (CEC § 210.8-B1). Refer to code sections for exact wording.